

直线轴承

LMF(K)P...UU 尼龙保持架
该类型尺寸是公制的，广泛应用于亚洲和其它国家。
所有型号均可根据客户要求做镀镍处理，有防锈作用。
LMF(K)P...UU (Resin retainer)
This type is a metric dimension series widely used in Asia and other countries.
All models can be done with nickle plated according to customers' requirements, with function of rust-proof.




LMFP...UU



LMKP...UU

公称轴径 Nominal shaft diameter mm	导向圆法兰 LMFP...UU	重量 Weight (g)	导向方法 LMKP...UU	重量 Weight (g)	钢球列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance					
						dr		D		L	
						mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
6	LMFP6UU	24	LMKP6UU	18	4	6	0 -9	12	0 -13	19	± 300
8	LMFP8UU	37	LMKP8UU	29		8		15		24	
10	LMFP10UU	72	LMKP10UU	52		10		19		29	
12	LMFP12UU	76	LMKP12UU	57		12		21	0	30	
13	LMFP13UU	88	LMKP13UU	72	5	13	0 -10	23	-16	32	
16	LMFP16UU	120	LMKP16UU	104		16		28		37	
20	LMFP20UU	180	LMKP20UU	145		20		32	0	42	
25	LMFP25UU	340	LMKP25UU	300		25		40	-19	59	
30	LMFP30UU	470	LMKP30UU	375	6	30	0 -12	45		64	
35	LMFP35UU	650	LMKP35UU	560		35		52		70	
40	LMFP40UU	1,060	LMKP40UU	880		40		60	0	80	
50	LMFP50UU	2,200	LMKP50UU	2,000		50		80	-22	100	
60	LMFP60UU	3,000	LMKP60UU	2,560		60		90	0	110	
80	LMFP80UU	5,800	LMKP80UU	5,300		80		120	-25	140	

密封型 Seal type: LMFP20 A UU	不标	不带密封	No entry	No seals
	UU	双密封	UU	Seal on both sides
	A	镀镍	A	Nickle plated

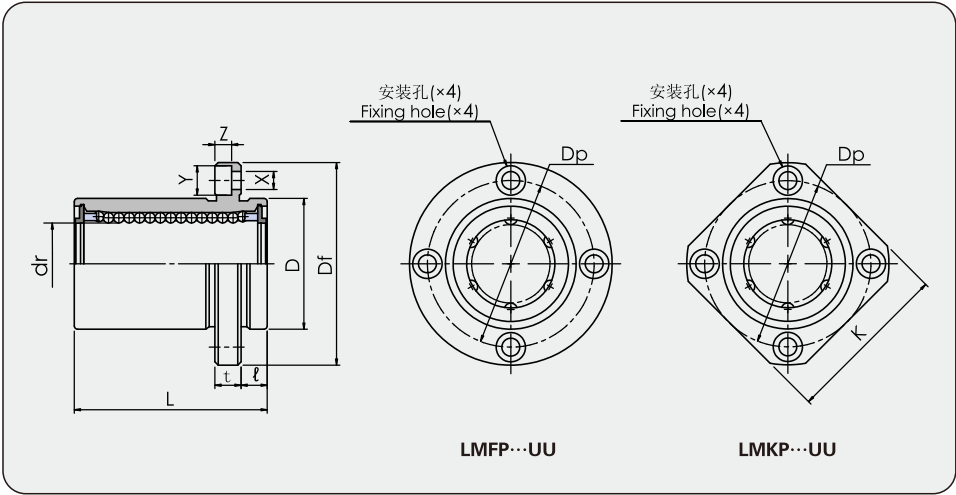

主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange										动负荷 Dynamic C N	静负荷 Static Co N
ℓ mm	Df mm	K mm	t mm	Dp mm	X mm	Y mm	Z mm				
5	28	22	5	20	3.5	6	3.1	12	12	206	265
5	32	25	5	24	3.5	6	3.1			274	392
6	40	30	6	29	4.5	7.5	4.1			372	549
6	42	32	6	32	4.5	7.5	4.1			510	784
6	43	34	6	33	4.5	7.5	4.1			510	784
6	48	37	6	38	4.5	7.5	4.1			774	1,180
8	54	42	8	43	5.5	9	5.1	15	15	882	1,370
8	62	50	8	51	5.5	9	5.1			980	1,570
10	74	58	10	60	6.6	11	6.1			1,570	2,740
10	82	64	10	67	6.6	11	6.1			1,670	3,140
13	96	75	13	78	9	14	8.1	20	20	2,160	4,020
13	116	92	13	98	9	14	8.1			3,820	7,940
18	134	106	18	112	11	17	11.1	25	25	4,700	10,000
18	164	136	18	142	11	17	11.1			7,350	16,000

国际单位: 1N≈0.102kgf
SIUNIT: 1N≈0.102kgf

直线轴承

LMF(K)P...GS 耐高温保持架
该类型尺寸是公制的，广泛应用于亚洲和其它国家。
所有型号均可根据客户要求做镀镍处理，有防锈作用。
LMF(K)P...GS (High-temperature Resistant Retainer)
This type is a metric dimension series widely used in Asia and other countries.
All models can be done with nickle plated according to customers' requirements, with function of rust-proof.




LMFP...GS

LMKP...GS

公称轴径 Nominal shaft diameter mm	导向圆法兰 LMFP...GS	重量 Weight (g)	导向方法兰 LMKP...GS	重量 Weight (g)	钢球列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance					
						dr		D		L	
						mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
6	LMFP6GS	25.3	LMKP6GS	19.3	4	6		12	0	19	
8	LMFP8GS	39.3	LMKP8GS	31.3		8		15	-13	24	
10	LMFP10GS	74.5	LMKP10GS	54.5		10		19		29	
12	LMFP12GS	81.2	LMKP12GS	62.2		12	0 -9	21	0	30	
13	LMFP13GS	95	LMKP13GS	79	5	13		23	-16	32	
16	LMFP16GS	137	LMKP16GS	121		16		28		37	
20	LMFP20GS	205	LMKP20GS	170		20		32		42	
25	LMFP25GS	402	LMKP25GS	362		25	0 -10	40	0 -19	59	
30	LMFP30GS	546	LMKP30GS	451	6	30		45		64	
35	LMFP35GS	789	LMKP35GS	659		35		52		70	
40	LMFP40GS	1,205	LMKP40GS	1,025		40	0 -12	60	0 -22	80	
50	LMFP50GS	2,200	LMKP50GS	2,000		50		80		100	
60	LMFP60GS	3,000	LMKP60GS	2,560		60	0	90	0	110	
80	LMFP80GS	5,800	LMKP80GS	5,300		80	-15	120	-25	140	

LMFP20 A GS	GS	钢保持架	GS	Steel retainer
	A	镀镍	A	Nickle plated

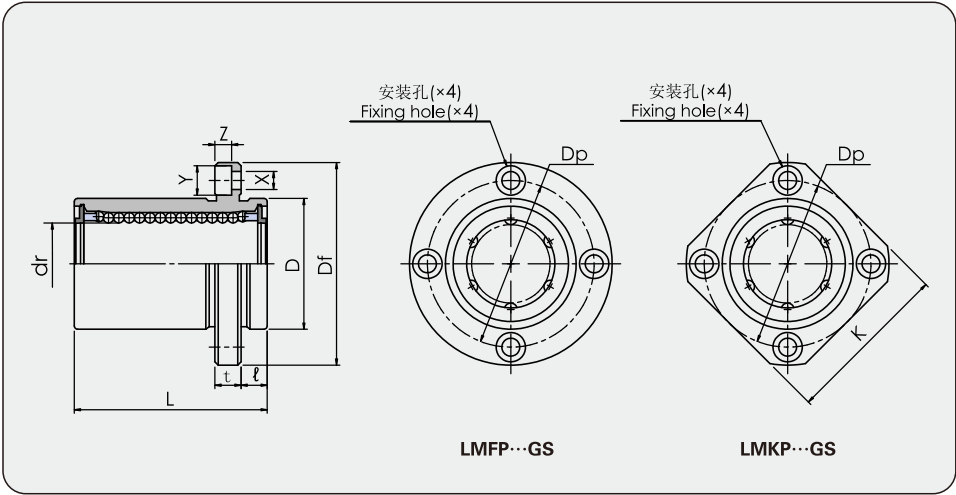

直线轴承

主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange										动负荷 Dynamic C N	静负荷 Static Co N
ℓ mm	Df mm	K mm	t mm	Dp mm	X mm	Y mm	Z mm				
5	28	22	5	20	3.5	6	3.1	12	12	206	265
5	32	25	5	24	3.5	6	3.1			274	392
6	40	30	6	29	4.5	7.5	4.1			372	549
6	42	32	6	32	4.5	7.5	4.1			510	784
6	43	34	6	33	4.5	7.5	4.1			510	784
6	48	37	6	38	4.5	7.5	4.1			774	1,180
8	54	42	8	43	5.5	9	5.1	15	15	882	1,370
8	62	50	8	51	5.5	9	5.1			980	1,570
10	74	58	10	60	6.6	11	6.1			1,570	2,740
10	82	64	10	67	6.6	11	6.1			1,670	3,140
13	96	75	13	78	9	14	8.1	20	20	2,160	4,020
13	116	92	13	98	9	14	8.1			3,820	7,940
18	134	106	18	112	11	17	11.1	25	25	4,700	10,000
18	164	136	18	142	11	17	11.1			7,350	16,000

国际单位: 1N≈0.102kgf
SIUNIT: 1N≈0.102kgf

直线轴承


LMHP...UU 尼龙保持架
该类型尺寸是公制的，广泛应用于亚洲和其它国家。
所有型号均可根据客户要求做镀镍处理，有防锈作用。
LMHP...UU (Resin retainer)
This type is a metric dimension series widely used in Asia and other countries.
All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LMHP...UU

公称轴径 Nominal shaft diameter mm	导向椭圆法兰 LMHP...UU	重量 Weight (g)	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance					
				dr		D		L	
				mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
6	LMHP6UU	21	4	6	0 -9	12	0 -13	19	± 300
8	LMHP8UU	33		8		15		24	
10	LMHP10UU	64		10		19		29	
12	LMHP12UU	68		12		21	0	30	
13	LMHP13UU	81	5	13	0 -9	23	-16	32	
16	LMHP16UU	112		16		28		37	
20	LMHP20UU	167		20		32		42	
25	LMHP25UU	325		25		40	0 -19	59	
30	LMHP30UU	388	6	30	0 -10	45		64	
35	LMHP35UU	580		35		52		70	
40	LMHP40UU	920		40		60	0 -22	80	
50	LMHP50UU	2,067		50		80		100	

密封型 Seal type:							
LMHP20 A UU							
不标		不带密封		No entry		No seals	
UU		双密封		UU		Seal on both sides	
A		镀镍		A		Nickle plated	

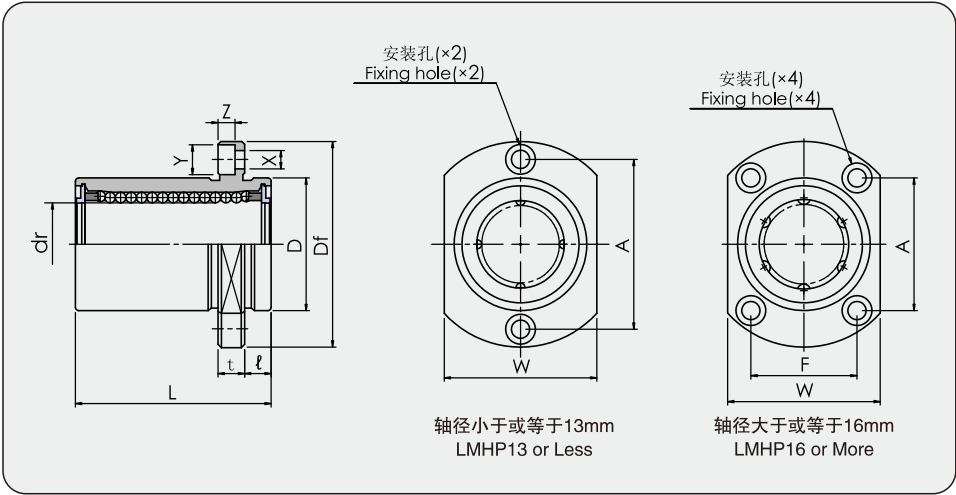

直线轴承

主要尺寸和公差 Major dimensions and tolerance									偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷	
法兰 Flange											Basic load rating	
ℓ mm	Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm			动负荷 Dynamic C N	静负荷 Static Co N
5	28	18	5	20	—	3.5	6	3.1	12	12	206	265
5	32	21	5	24	—	3.5	6	3.1			274	392
6	40	25	6	29	—	4.5	7.5	4.1			372	549
6	42	27	6	32	—	4.5	7.5	4.1			510	784
6	43	29	6	33	—	4.5	7.5	4.1			510	784
6	48	34	6	31	22	4.5	7.5	4.1			774	1,180
8	54	38	8	36	24	5.5	9	5.1	15	15	882	1,370
8	62	46	8	40	32	5.5	9	5.1			980	1,570
10	74	51	10	49	35	6.6	11	6.1			1,570	2,740
10	82	60	10	55	38	6.6	11	6.1			1,670	3,140
13	96	70	13	64	45	9	14	8.1	20	20	2,160	4,020
13	116	90	13	80	56	9	14	8.1			3,820	7,940

国际单位：1N ≈ 0.102kgf
SIUNIT: 1N ≈ 0.102kgf

直线轴承


LMHP...GS 耐高温保持架
该类型尺寸是公制的，广泛应用于亚洲和其它国家。
所有型号均可根据客户要求做镀镍处理，有防锈作用。
LMHP...GS (High-temperature Resistant Retainer)
This type is a metric dimension series widely used in Asia and other countries.
All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LMHP...GS

公称轴径 Nominal shaft diameter mm	导向椭圆法兰 LMHP...GS	重量 Weight (g)	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance					
				dr		D		L	
				mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
6	LMHP6GS	22.3	4	6	0 -9	12	0	19	± 300
8	LMHP8GS	35.3		8		15	-13	24	
10	LMHP10GS	65.5		10		19		29	
12	LMHP12GS	73.2		12		21	0	30	
13	LMHP13GS	88	5	13	0 -9	23	-16	32	
16	LMHP16GS	129		16		28		37	
20	LMHP20GS	192		20		32		42	
25	LMHP25GS	387		25	0 -10	40	0	59	
30	LMHP30GS	464	6	30		45	-19	64	
35	LMHP35GS	679		35	0 -12	52		70	
40	LMHP40GS	1,065		40		60	0	80	
50	LMHP50GS	2,067		50		80	-22	100	

LMHP20 A GS	GS	钢保持架	GS	Steel retainer
	A	镀镍	A	Nickle plated

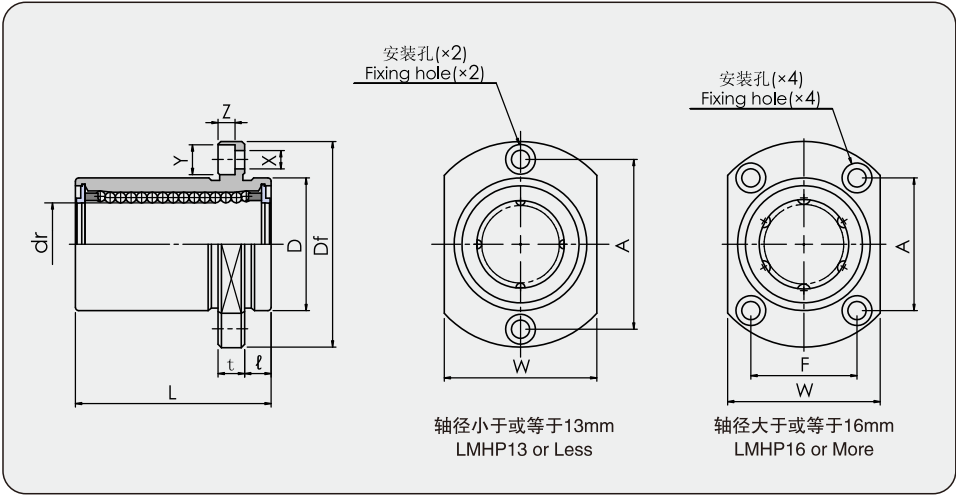

直线轴承

主要尺寸和公差 Major dimensions and tolerance									偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange											动负荷 Dynamic C N	静负荷 Static Co N
ℓ mm	Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm				
5	28	18	5	20	—	3.5	6	3.1	12	12	206	265
5	32	21	5	24	—	3.5	6	3.1			274	392
6	40	25	6	29	—	4.5	7.5	4.1			372	549
6	42	27	6	32	—	4.5	7.5	4.1			510	784
6	43	29	6	33	—	4.5	7.5	4.1			510	784
6	48	34	6	31	22	4.5	7.5	4.1			774	1,180
8	54	38	8	36	24	5.5	9	5.1	15	15	882	1,370
8	62	46	8	40	32	5.5	9	5.1			980	1,570
10	74	51	10	49	35	6.6	11	6.1			1,570	2,740
10	82	60	10	55	38	6.6	11	6.1			1,670	3,140
13	96	70	13	64	45	9	14	8.1	20	20	2,160	4,020
13	116	90	13	80	56	9	14	8.1			3,820	7,940

国际单位：1N ≈ 0.102kgf
SIUNIT：1N ≈ 0.102kgf

直线轴承

LMF(K)P...LUU 尼龙保持架
该类型尺寸是公制的，广泛应用于亚洲和其它国家。
所有型号均可根据客户要求做镀镍处理，有防锈作用。
LMF(K)P...LUU (Resin retainer)
This type is a metric dimension series widely used in Asia and other countries.
All models can be done with nickle plated according to customers' requirements, with function of rust-proof.




LMFP...LUU



LMKP...LUU

公称轴径 Nominal shaft diameter mm	加长导向法兰 LMFP...LUU	重量 Weight (g)	加长导向方法兰 LMKP...LUU	重量 Weight (g)	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance					
						dr		D		L	
						mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
6	LMFP6LUU	31	LMKP6LUU	25	4	6	0 -10	12	0 -13	35	± 300
8	LMFP8LUU	51	LMKP8LUU	43		8		15		45	
10	LMFP10LUU	98	LMKP10LUU	78		10		19		55	
12	LMFP12LUU	110	LMKP12LUU	90		12		21	0	57	
13	LMFP13LUU	130	LMKP13LUU	108	5	13	0 -12	23	-16	61	
16	LMFP16LUU	190	LMKP16LUU	165		16		28		70	
20	LMFP20LUU	260	LMKP20LUU	225		20		32	0	80	
25	LMFP25LUU	540	LMKP25LUU	500		25		40	-19	112	
30	LMFP30LUU	680	LMKP30LUU	590	6	30	0 -15	45		123	
35	LMFP35LUU	1,020	LMKP35LUU	930		35		52		135	
40	LMFP40LUU	1,570	LMKP40LUU	1,380		40		60	0	151	
50	LMFP50LUU	3,600	LMKP50LUU	3,400		50		80	-22	192	
60	LMFP60LUU	4,500	LMKP60LUU	4,060		60		90	0	209	
80	LMFP80LUU	9,090	LMKP80LUU	8,590		80		120	-25	265	

密封型 Seal type: LMFP20 L A UU	不标	不带密封	No entry	No seals
	UU	双密封	UU	Seal on both sides
	A	镀镍	A	Nickle plated

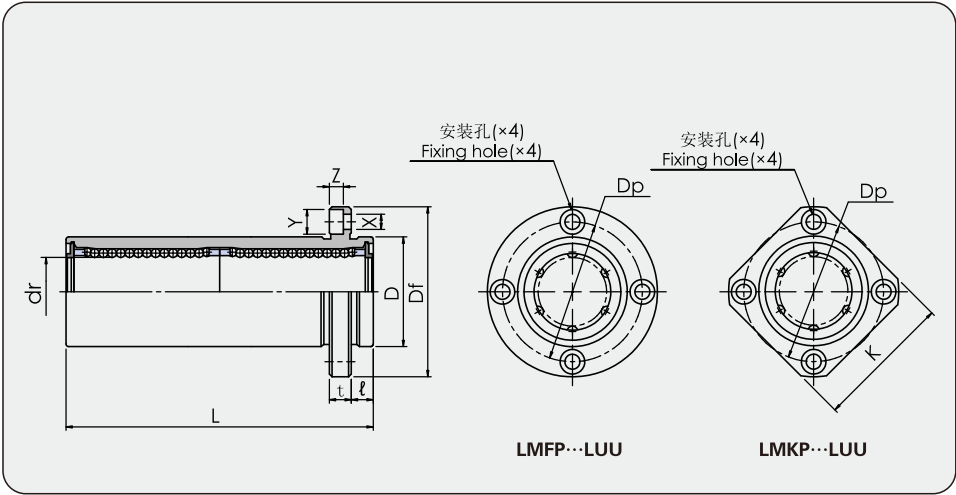

主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange										动负荷 Dynamic C N	静负荷 Static Co N
ℓ mm	Df mm	K mm	t mm	Dp mm	X mm	Y mm	Z mm				
5	28	22	5	20	3.5	6	3.1	15	15	323	529
5	32	25	5	24	3.5	6	3.1			431	781
6	40	30	6	29	4.5	7.5	4.1			588	1,100
6	42	32	6	32	4.5	7.5	4.1			813	1,570
6	43	34	6	33	4.5	7.5	4.1			813	1,570
6	48	37	6	38	4.5	7.5	4.1			1,230	2,350
8	54	42	8	43	5.5	9	5.1	20	20	1,400	2,740
8	62	50	8	51	5.5	9	5.1			1,560	3,140
10	74	58	10	60	6.6	11	6.1			2,490	5,490
10	82	64	10	67	6.6	11	6.1			2,650	6,270
13	96	75	13	78	9	14	8.1	25	25	3,430	8,040
13	116	92	13	98	9	14	8.1			6,080	15,900
18	134	106	18	112	11	17	11.1	30	30	7,550	20,000
18	164	136	18	142	11	17	11.1			11,500	32,000

国际单位：1N≈0.102kgf
SIUNIT: 1N≈0.102kgf

直线轴承

LMF(K)P...LGS 耐高温保持架
该类型尺寸是公制的，广泛应用于亚洲和其它国家。
所有型号均可根据客户要求做镀镍处理，有防锈作用。
LMF(K)P...LGS (High-temperature Resistant Retainer)
This type is a metric dimension series widely used in Asia and other countries.
All models can be done with nickle plated according to customers' requirements, with function of rust-proof.




LMFP...LGS

LMKP...LGS

公称轴径 Nominal shaft diameter mm	加长导向圆法兰 LMFP...LGS	重量 Weight (g)	加长导向方法兰 LMKP...LGS	重量 Weight (g)	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance					
						dr		D		L	
						mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
6	LMFP6LGS	33.6	LMKP6LGS	27.6	4	6	0 -10	12	0 -13	35	± 300
8	LMFP8LGS	55.6	LMKP8LGS	47.6		8		15	-13	45	
10	LMFP10LGS	103	LMKP10LGS	83		10		19		55	
12	LMFP12LGS	120.4	LMKP12LGS	100.4		12		21	0	57	
13	LMFP13LGS	144	LMKP13LGS	122	5	13	0 -12	23	-16	61	
16	LMFP16LGS	224	LMKP16LGS	199		16		28		70	
20	LMFP20LGS	310	LMKP20LGS	275		20		32	0	80	
25	LMFP25LGS	664	LMKP25LGS	624		25		40	-19	112	
30	LMFP30LGS	832	LMKP30LGS	742	6	30	0 -15	45		123	
35	LMFP35LGS	1,218	LMKP35LGS	1,128		35		52		135	
40	LMFP40LGS	1,860	LMKP40LGS	1,670		40		60	0	151	
50	LMFP50LGS	3,600	LMKP50LGS	3,400		50		80	-22	192	
60	LMFP60LGS	4,500	LMKP60LGS	4,060		60		90	0	209	
80	LMFP80LGS	9,090	LMKP80LGS	8,590		80		120	-25	265	

LMFP20 L A GS	GS	钢保持架	GS	Steel retainer
	A	镀镍	A	Nickle plated

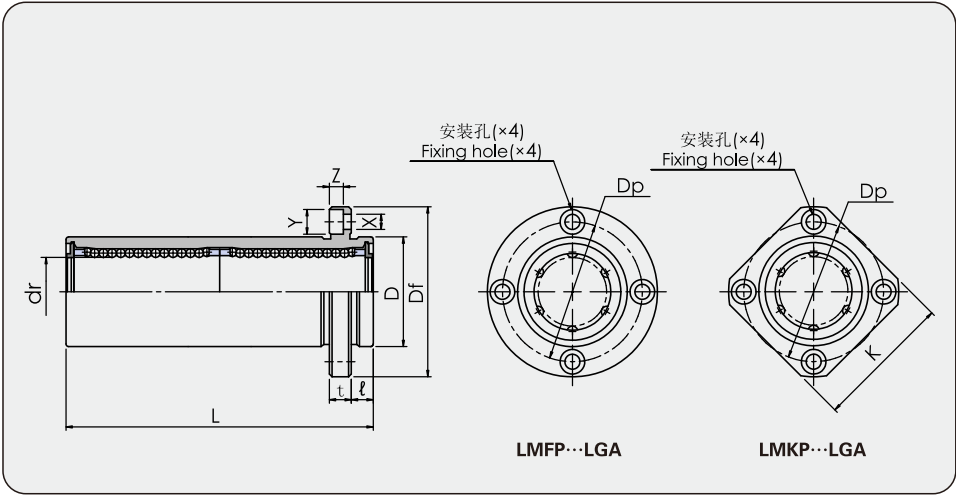

主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange										动负荷 Dynamic C N	静负荷 Static Co N
ℓ mm	Df mm	K mm	t mm	Dp mm	X mm	Y mm	Z mm				
5	28	22	5	20	3.5	6	3.1	15	15	323	529
5	32	25	5	24	3.5	6	3.1			431	781
6	40	30	6	29	4.5	7.5	4.1			588	1,100
6	42	32	6	32	4.5	7.5	4.1			813	1,570
6	43	34	6	33	4.5	7.5	4.1			813	1,570
6	48	37	6	38	4.5	7.5	4.1			1,230	2,350
8	54	42	8	43	5.5	9	5.1	20	20	1,400	2,740
8	62	50	8	51	5.5	9	5.1			1,560	3,140
10	74	58	10	60	6.6	11	6.1			2,490	5,490
10	82	64	10	67	6.6	11	6.1			2,650	6,270
13	96	75	13	78	9	14	8.1	25	25	3,430	8,040
13	116	92	13	98	9	14	8.1			6,080	15,900
18	134	106	18	112	11	17	11.1	30	30	7,550	20,000
18	164	136	18	142	11	17	11.1			11,500	32,000

国际单位: 1N≈0.102kgf
SIUNIT: 1N≈0.102kgf

直线轴承


LMHP...LUU 尼龙保持架
该类型尺寸是公制的，广泛应用于亚洲和其它国家。
所有型号均可根据客户要求做镀镍处理，有防锈作用。
LMHP...LUU (Resin retainer)
This type is a metric dimension series widely used in Asia and other countries.
All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LMHP...LUU

公称轴径 Nominal shaft diameter mm	加长导向椭圆法兰 LMHP...LUU	重量 Weight (g)	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance					
				dr		D		L	
				mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
6	LMHP6LUU	28	4	6	0 -10	12	0 -13	35	± 300
8	LMHP8LUU	47		8		15		45	
10	LMHP10LUU	90		10		19		55	
12	LMHP12LUU	102		12		21	0	57	
13	LMHP13LUU	123	5	13	0 -12	23	-16	61	
16	LMHP16LUU	182		16		28		70	
20	LMHP20LUU	247		20		32	0	80	
25	LMHP25LUU	525		25		40	-19	112	
30	LMHP30LUU	645	6	30	0 -15	45		123	
35	LMHP35LUU	950		35		52		135	
40	LMHP40LUU	1,450		40		60	0 -22	151	
50	LMHP50LUU	3,467		50		80		192	

密封型 Seal type:				不标		No entry	
LMHP20 L A UU				UU		UU	
				双密封		Seal on both sides	
				A		A	
				镀镍		Nickle plated	

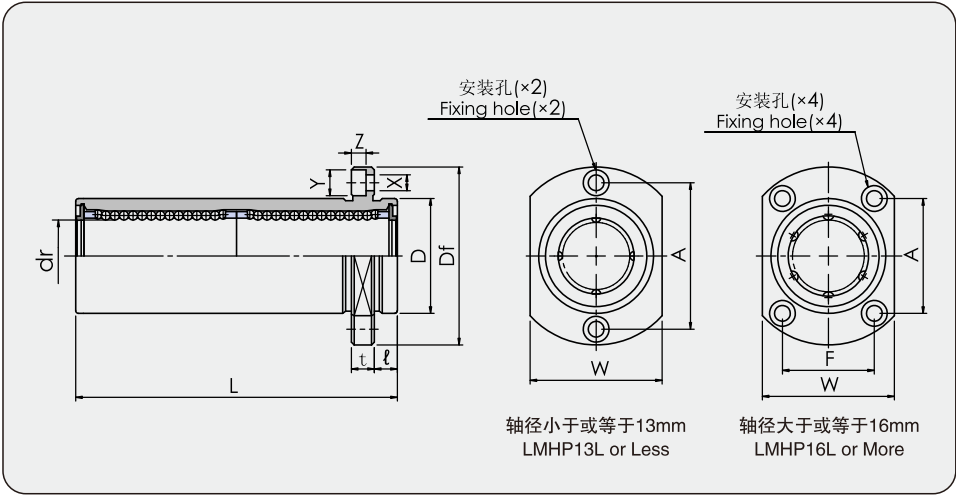

直线轴承

主要尺寸和公差 Major dimensions and tolerance									偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷	
法兰 Flange											Basic load rating	
ℓ mm	Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm			动负荷 Dynamic C N	静负荷 Static Co N
5	28	18	5	20	—	3.5	6	3.1	15	15	323	529
5	32	21	5	24	—	3.5	6	3.1			431	784
6	40	25	6	29	—	4.5	7.5	4.1			588	1,100
6	42	27	6	32	—	4.5	7.5	4.1			813	1,570
6	43	29	6	33	—	4.5	7.5	4.1			813	1,570
6	48	34	6	31	22	4.5	7.5	4.1			1,230	2,350
8	54	38	8	36	24	5.5	9	5.1	20	20	1,400	2,740
8	62	46	8	40	32	5.5	9	5.1			1,560	3,140
10	74	51	10	49	35	6.6	11	6.1			2,490	5,490
10	82	60	10	55	38	6.6	11	6.1			2,650	6,270
13	96	70	13	64	45	9	14	8.1	25	25	3,430	8,040
13	116	90	13	80	56	9	14	8.1			6,080	15,900

国际单位：1N ≈ 0.102kgf
SIUNIT: 1N ≈ 0.102kgf



直线轴承

LMHP...LGS 耐高温保持架
该类型尺寸是公制的，广泛应用于亚洲和其它国家。
所有型号均可根据客户要求做镀镍处理，有防锈作用。
LMHP...LGS (High-temperature Resistant Retainer)
This type is a metric dimension series widely used in Asia and other countries.
All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LMHP...LGS

公称轴径 Nominal shaft diameter mm	加长导向椭圆法兰 LMHP...LGS	重量 Weight (g)	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance					
				dr		D		L	
				mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
6	LMHP6LGS	30.6	4	6		12	0	35	± 300
8	LMHP8LGS	51.6		8		15	-13	45	
10	LMHP10LGS	95		10		19		55	
12	LMHP12LGS	112.4		12	0 -10	21	0	57	
13	LMHP13LGS	137	5	13		23	-16	61	
16	LMHP16LGS	216		16		28		70	
20	LMHP20LGS	297		20		32		80	
25	LMHP25LGS	649		25	0 -12	40	0 -19	112	
30	LMHP30LGS	797	6	30		45		123	
35	LMHP35LGS	1,148		35		52		135	
40	LMHP40LGS	1,740		40	0 -15	60	0 -22	151	
50	LMHP50LGS	3,467		50		80		192	

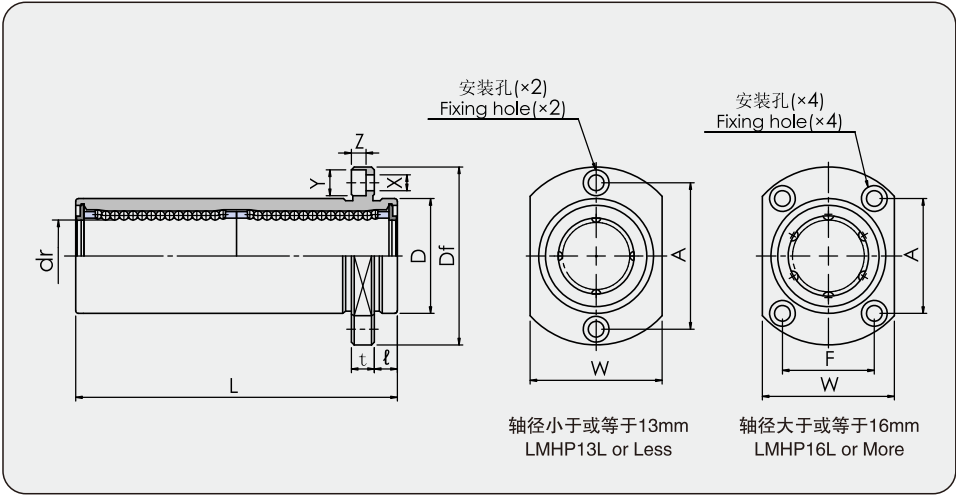

直线轴承

主要尺寸和公差 Major dimensions and tolerance									偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷	
法兰 Flange											Basic load rating	
ℓ mm	Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm			动负荷 Dynamic Co N	静负荷 Static Co N
5	28	18	5	20	—	3.5	6	3.1	15	15	323	529
5	32	21	5	24	—	3.5	6	3.1			431	784
6	40	25	6	29	—	4.5	7.5	4.1			588	1,100
6	42	27	6	32	—	4.5	7.5	4.1			813	1,570
6	43	29	6	33	—	4.5	7.5	4.1			813	1,570
6	48	34	6	31	22	4.5	7.5	4.1			1,230	2,350
8	54	38	8	36	24	5.5	9	5.1	20	20	1,400	2,740
8	62	46	8	40	32	5.5	9	5.1			1,560	3,140
10	74	51	10	49	35	6.6	11	6.1			2,490	5,490
10	82	60	10	55	38	6.6	11	6.1			2,650	6,270
13	96	70	13	64	45	9	14	8.1	25	25	3,430	8,040
13	116	90	13	80	56	9	14	8.1			6,080	15,900

国际单位：1N ≈ 0.102kgf
SIUNIT：1N ≈ 0.102kgf